

NN EXPLORE .

Partnership for Exoplanet Discovery and Characterization,

NN-EXPLORE: WIYN Stage 1 Science

Steve B. Howell Kepler / K2 Project Scientist

With Contributions from: Lori Allen, Di Harmer, Knicole Colon, Joel Hartman, Verne Smith, Mark Giampapa, Nic Scott

NN-EXPLORE GO Program

NASA and NSF should support an aggressive program of ground-based highprecision radial velocity surveys of nearby stars in order to validate and characterize exoplanet candidates. Need candidates (K2 and TESS and other sources) and additional ground-based observations as well.

NN-EXPLORE will "conduct ground-based observations that advance exoplanet science, with particular emphasis on Kepler, K2, and (eventually) TESS follow-up observations and on observations that inform future NASA missions, such as the James Webb Space Telescope (JWST) and the Wide Field Infrared Survey Telescope – Astrophysics Focused Telescope Assets (WFIRST-AFTA) mission.



NN EXPLORE

NN-EXPLORE GO Program

Stage 1 – Pre-commissioning (through Sep 2019)

Simultaneous with the instrument development, NASA will manage an exoplanet-targeted Guest Observer program with existing instrumentation using NOAO share of WIYN (40%; approximately 100 nights/year, ~50/semester).

Stage 2 Post-commissioning (Starting in Oct 2019)



NN-EXPLORE GO Program

- GO program is already under way
 - Started in Semester 2015B (1 Aug 2015 Jan 31 2016)
 - Semester 2016A (1 February 2016 30 July 2016)
 - Semester 2016B (1 Aug 2016 31 Jan 2017)
 - Proposals just selected.







NN EXPLORE .

| Imaging | Spectroscopy | |
|---|--|--|
| One Degree Imager "ODI" 0.1" pixels; 40'x48' fov SDSS u', g', r', i', z' filters Science pipeline | HYDRA ~100 fibers red or blue; ~1 deg fov Feeds bench spectrograph Data reduction cookbook | |
| WIYN High Resolution Infrared Camera (WHIRC) 0.1" pixels; 3.3' x 3.3' fov J,H,K + 10 narrowband filters WIYN Tip-Tilt Module (WTTM) = fast guider Data reduction cookbook | IFU modules Visitor Instrument (Bershady) SparsePak, GradPak, HexPak Feeds bench spectrograph | |
| Differential Speckle Survey Instrument (DSSI) Visitor Instrument (Howell/Horch) Simult. 2-band, diffraction-limited images V~14.5, 0.04" resolution (650nm), 2.8" fov Queue mode + science pipeline. WIYNSPKL coming Oct. 2016 | Bench spectrograph R = 800 - 20,000 $\lambda\lambda = 300 - 1000$ nm | |

NASA/WIYN proposals

| Instrument | 2015B #prp/#nts | 2016A #prp/#nts | 2016B #prp/#nts |
|------------|--------------------|--------------------|--------------------|
| NASA-GO | 16/59 | 18/85 | 16/54 |
| HYDRA | 8/37 | 9/46 | 7/28 |
| DSSI | 6/17 | 5/17 | 5/13 |
| WHIRC | 2/5 | 3/15 | 2/8 |
| ODI | | 1/10 | 2/5 |
| IFUs | | | |



NN EXPLORE .




Instrument Use


- Instruments:
 - ODI multiple colors, transit light curves, comparison star(s)
 - HYDRA one to a few fibers, exoplanet host characterization, metallicity
 - WHIRC transit light curves
 - DSSI (queue mode) host star multiplicity, (small) exoplanet validation, CFOP contributions
- Note: very little Exoplanet science done at WIYN prior to NN-EXPLORE program except DSSI; used since 2008 for Kepler FOP, now K2 ExoFOP



Follow-up of HATNet Exoplanet Candidates: Joel Hartman

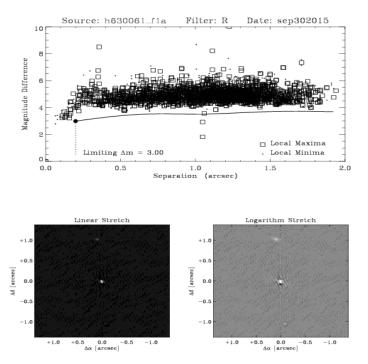

DSSI detects (low-mass) stellar companions to transiting planet candidates from HAT. 79 HATNet targets have been observed, 9 confirmed planets

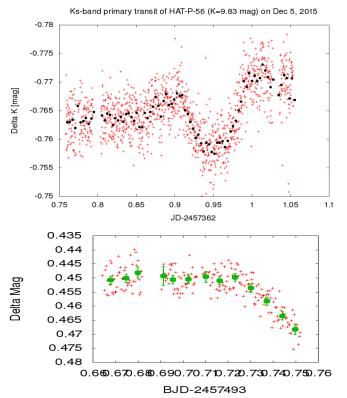


WHIRC observes primary or secondary transit events. Top: K-band transit for HAT-P-56b. Bottom: J-band ingress \rightarrow EB; deeper transit in J than r-band.

Partnership for Exoplanet Discovery and Characterization

NNEXPL

Knicole Colón

- Goal is to validate and characterize K2 exoplanets
- Observed 8 targets during 24-29 March 2016 run with Rp = 1.44-10.9 Re and Ks = 8.9-12.4

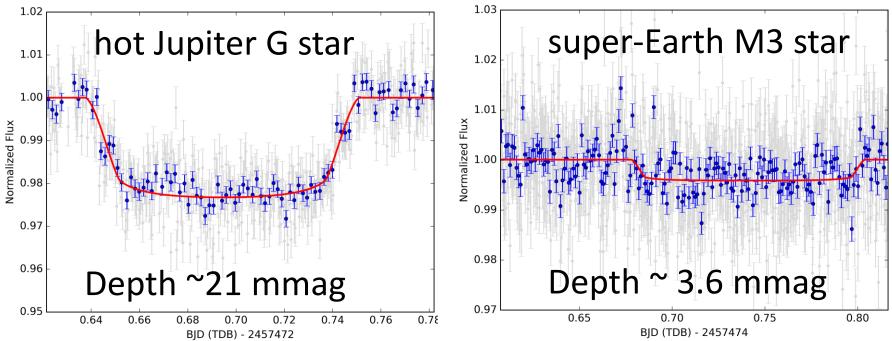







K2 and WIYN/Hydra Observations of Solar-type Stars in M67 Mark Giampapa



A. Önehag et al.: M67-1194, an unusually Sun-like solar twin in M67


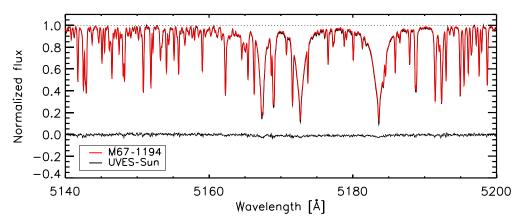


Fig. 2. Observations of the Mg1b triplet region, for both M67-1194 (black) and the FLAMES-UVES Sun (red). A difference spectrum is plotted below.

Mg b triple region – red = host star, black = UVES solar spectrum. Difference Shown at bottom. K2 light curve of same star



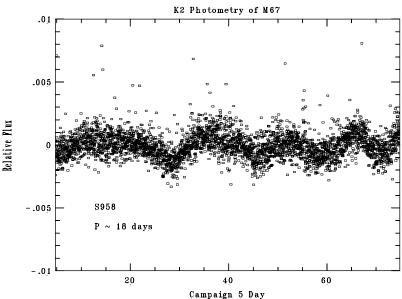

Partnership for Exoplanet Discovery and Characterization


NN EXPLORE




Accurate Stellar Characterization & Metallicity for Kepler and K2 Exoplanet Host Stars



V. Smith, K. Cunha, C. Martinez, J. Teske, S. Howell, S. Schuler, L. Ghezzi

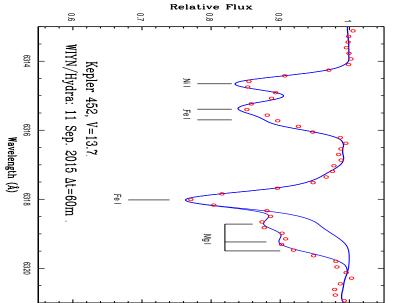


Results for Kepler 452: Spectra used to derive values for T_{eff} , log g, metallicity, plus detailed abundance distributions. WIYN/Hydra spectrum showing Mg I.

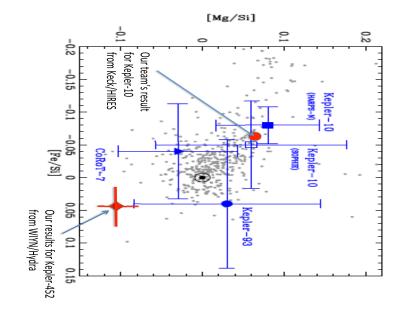

The ratio of [Mg/Si] plays a role in the structure of rocky planets.









WIYN Speckle Imaging: Companion Detection & (Small) Exoplanet Validation

Reconstructed Images – What WIYN + Speckle sees 562 nm

Panchromatic Integrated Image

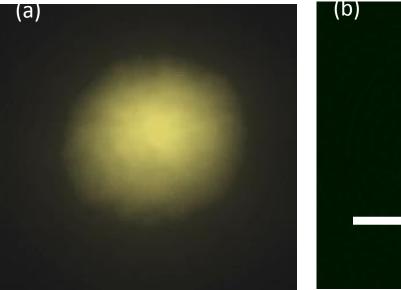

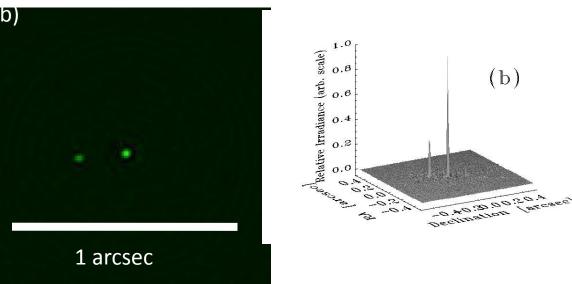




NN EXPLORE



Kepler follow-up with speckle imaging

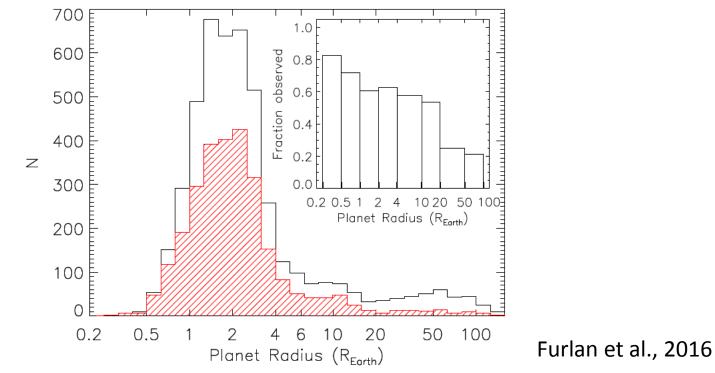


DSSI: 40+ separate papers with over >200 (small) planet validations. DSSI FOP data used in all Kepler, and K2 catalogue papers, >1000 Kepler & K2 KOIs and RV planet host star speckle images in NASA archive



NN EXPLORE


Binary Star Detection – RV vs. high-resolution imaging

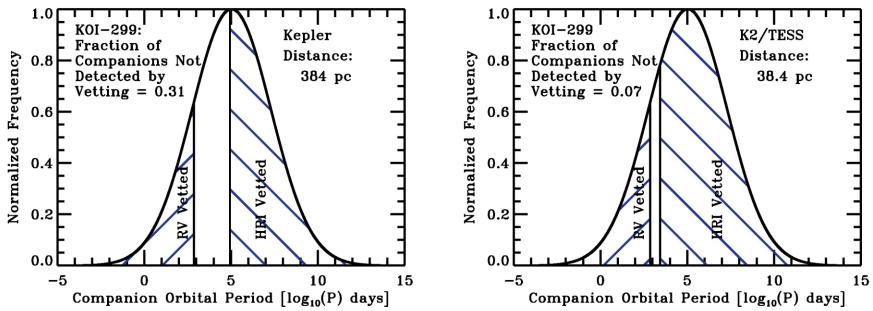

- Delta magnitudes of up to 5, ~0.04" 1.4" spatial resolution
- 5-20 AU resolution for typical Kepler stars
- 1-2 AU resolution for K2 and TESS stars, nearby stars, and for typical RV planet host stars
- Need hi-res imaging in both hemispheres (DSSI also at Gemini-N and S)



K2 Exoplanet candidate

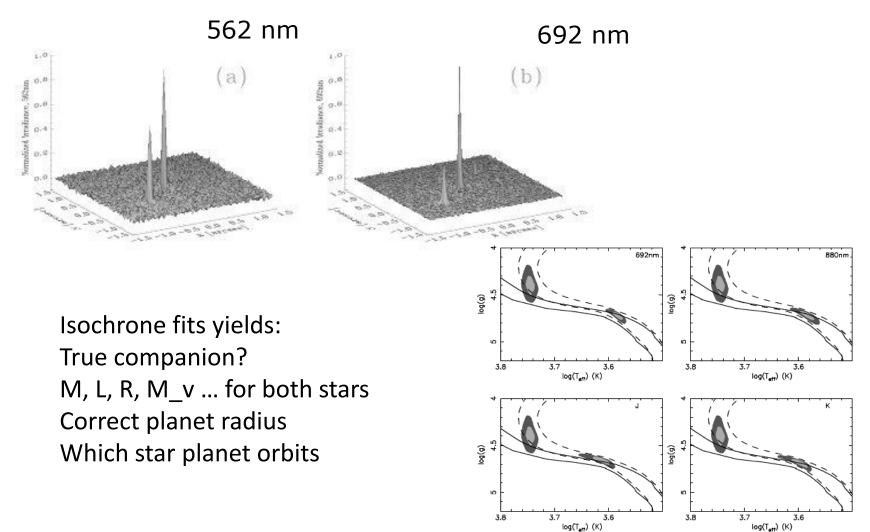

Partnership for Exoplanet Discovery and Characterization.

NN EXPL

Reaching the Diffraction Limit

Differential Speckle and Wide-Field Imaging for the WIYN Telescope


Nic J Scott¹, Steve Howell², Elliott Horch³

Introduction

Speckle imaging allows telescopes to achieve diffraction limited imaging performance. The technique requires canness capable of reading out frames at a very for start, effectively freezing out at monopheric senier, the renalizing speckles can be correlated and images reconstructed that are at the diffraction limit of the telescope. These new instruments are based on the successful performance and design of the Differential Speckle Scorey Internuent (USES) [2, 1].

The instruments are being built for the Gemini-N and WIYN telescopes and will be made available to the community via the peer review proposal process. We environ their primary use to be validation and characterization of exoplanet targets from the NASK V and TESS missions and N discovered exoplanets. Such targets will provide excellent follow and candidates for both the WIYN and Gemini telescopes [3]. Examples of DSSI data are shown in the figures below. We expect similar data quality in specific imaging mode with the new instruments.

Additionally, both cancera will have a wide field mode and standard SDSS fitters. They will be highly versatile instruments and it is that likely many other science programs will request time on the canceras. The limiting magnitude for speckle observations, will remain around 13 kHo at WIVN and 16 Trih ar Gennik, while wide field, normal CCD imaging operations should be able to go to much finiter, providing usual CCD imaging and photometric capabilities. The instruments will also have high utility as scoring canness for theoreace engineering purposes, or othe applications where high time resolution is needed. Instrument support will be provided, including a software pipeline that takes raw speckle data to fully reconstructed images.





Focal Length

Detector Image Plane

Unvignetted Circle Dia 22 "

Magnification

Detector FoV

Pixel Scale

L1

L2

Telescope f/# 6.289 Plate scale 9.374 "/mm WIYNSPKL - Speckle mode

30 mm

200 mm

6.67x

19 x 19 ⁴

0.0182 "/px

| WIYNSPKL - | Wide-field mod | | | | |
|----------------------|----------------|--|--|--|--|
| Focal Lengths | | | | | |
| L1 | 100 mm | | | | |
| L2 | 150 mm | | | | |
| Detector Image Plane | | | | | |
| Magnification | 1.5x | | | | |

image

Pixel Scale 0.0813 "/px Unvignetted Circle Dia 56 " Detector FoV 83 x 83 "



~60 " of M13 from the HST archive. This is a scale comparable to what will be available in WF mode.

300 400 500 100 100 900 1000 100 Www.irrqth (nm) Detector QE/SDSS Filter Transmission

0.5

0.4

NASA Ames Research Center

NASA

0.058 " FWHM @ 800 nm



This allows the blue (447nm) and green (562nm) filters in the reflective channel and the red (692nm) and infrared (880 nm) filters in the transmissive channel.

| Filter Wheel A | central λ , bandwidth | Filter Wheel B | central λ , bandwidth |
|----------------|-------------------------------|----------------|-------------------------------|
| SDSS/g | 480 nm, 140 nm | SDSS/i | 770 nm, 150 nm |
| SDSS/r | 625 nm, 140 nm | SDSS/z | 910 nm, 120 nm |
| g-narrow | 466 nm, 40 nm | i-narrow | 692 nm, 40 nm |
| r-narrow | 562 nm, 40 nm | z-narrow | 832 nm. 40 nm |

Detectors

The instrument will use two identical Ander Xion Ultra 888 EMCCD cameras. = Ultra 1024 × 1024 with 13 µm square pick = Capable of 26 fps reading out the full chip, higher for subarray readout (speckle mode) = EX costing .-> 80% quantum efficiency from 420 to 1780 nm, > 90% QE between 550 and 720 nm. = Thermoelectrically cooled, require no communidae. = Ubar is transferred to the control computer via USB3, no internal cards = Control computer can be quite small with heat dissipation being minimal. Maximum Resolution

WIYN 0.036 " FWHM @ 500 nm

Discussion

Possible Exoplanet Applications

Simultaneous two color transit photometry yields instant verification (same depth in both channels).
Standard imaging provides host star photometry
Speckle imaging assesses binarity and yielding correct exoplanet radius


Future Expansion

The filter wheels each have two remaining empty slots, we are currently exploring possible uses for these including the addition of: • Transmission Grating - Grism

Aperture Mask

Possible science application include: exoplanet transit spectroscopy, exoplanet atmosphere detection, transient object classification and characterization. An aperture mask would allow spatial resolution beyond the diffraction limit! Achieving true interferometric resolution

(2.44x the diffraction limit). This could be especially interesting if used on next-generation ELTs.

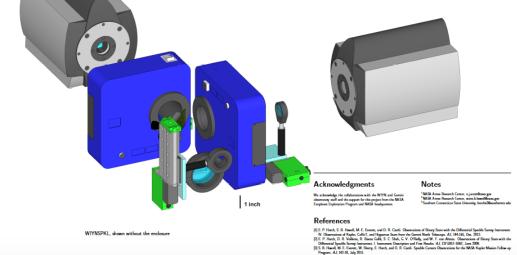

WIYNSPKL: New camera to be commissioned at WIYN in early Oct 2016

1024 X 1024 EMCCDs Narrow and SDSS filters Speckle ~20" mode Wide-field ~60" mode Fast readout, 26 fps

NN-EXPLORE "speckle" postdoc at NOAO to help community (July 2016)